



INDUSTRIAL



UTILITY

METHANOL FUEL CELL MODULE HIGH VOLTAGE VARIANTS

H5000 H3



- Low noise and no harmful emission
- Compact and light footprint
- High efficiency and lower fuel costs
- Flexible installation in- and outdoor
- Reduction of CO₂ footprint
- Elimination of fuel and equipment theft



CLEAN ENERGY



SUSTAINABILITY



PROFITABILITY



SIMPLICITY



RELIABILITY



KNOW-HOW

Clean, simple and sustainable power

The H3 5000 fuel cell systems offer a simple, powerful and reliable solution for on-demand power generation. On top of that, it is uniquely designed in a way where methanol is reformed on site to hydrogen. This means that the fuel for SerEnergy systems is liquid and is not only easily distributed but also available all around the world. The system produces up to 5kW and as the system is modular, multiple systems can be interconnected.

The system delivers DC power directly, meaning that it is a highly efficient solution. There is no need for additional converters that have high power losses as a result. This reduces complexity and fuel consumption on site.

The system has built-in energy management system to combine with hybrid systems such as wind or solar power.

As a low maintenance power solution the system is ideal for critical backup power, temporary or continuous 24/7. This means that the system can work in off-grid applications as well as backup power in grid applications.

The system uses HT-PEM technology which is unique and offers many advantages.

METHANOL FUEL CELL MODULE

| HIGH VOLTAGE VARIANTS | |
|-----------------------|----------|
| 190 [Vdc] | 144-237 |
| 250 [Vdc] | 200-312 |
| 380 [Vdc] | 288-474 |
| 500 [Vdc] | 400-624 |
| 760 [Vdc] | 576-948 |
| 1000 [Vdc] | 800-1248 |

| PERFORMANCE | |
|------------------------------------|---------|
| Max power output ¹ [kW] | 5 |
| Nominal output [kW] | 3.75 |
| Turn down [%] | 0 - 100 |
| IP rating | IP-20 |

1. Max power at beginning of life

| OPERATIONS | |
|--|---|
| Fuel mix | 60% vol methanol, 40% vol deionized water |
| Fuel consumption ² [l/kWh] | 0,897 |
| Net electric efficiency ² [%] | 41 |
| Ambient temperature ³ [°C] | -20°C and up to 50°C |
| Interfaces | AUX, HTTP/SNMP/Ethernet IP, CAN open, Remote monitoring and USB |

2. At beginning of life and rated load
 3. Options for lower temperatures


| WEIGHT & DIMENSIONS | |
|-----------------------------|----------|
| Hight [mm] / Rack units [U] | 267 / 6 |
| Width [mm] / Rack size [in] | 430 / 19 |
| Length ⁴ [mm] | 702 |
| Weigth [kg] | 65,5 |
| Volume [l] | 80,6 |

4. Length excluding handles, connectors on front and exhaust pipes on rear

All numbers related to kW or kWh is electrical power / Energy delivered at module terminals (kWe / kWhe)

Contact SerEnergy for other voltage variants.

TYPICAL SET-UP

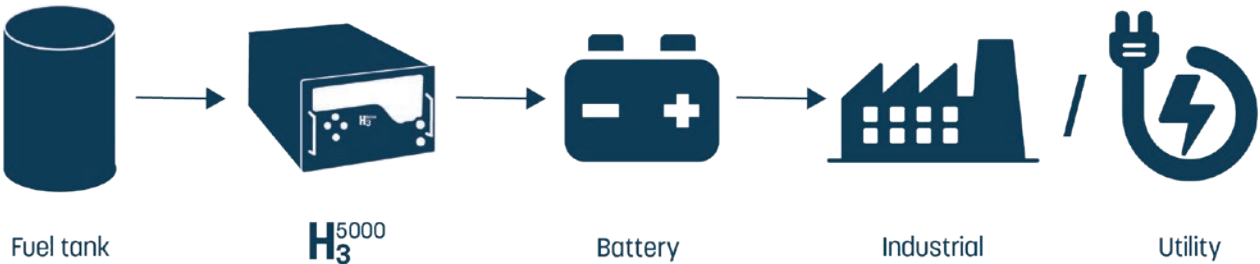

DIMENSIONS

